

**M8-Round-Plug Connector, Single-Ended Cordsets,  
According to IEC 61976-2-104**


RKMV | RKMVV



**3-, 4-, and 8-Poles**


Actuator/sensor cordset, single-ended, M8, 3-, 4-, and 8-poles, female straight connector with self-locking threaded joint and molded cable.

RKMV

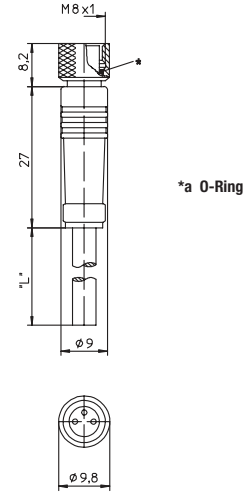

Actuator/sensor cordset, single-ended, M8, 3-, 4-, and 8-poles, female 90° connector with self-locking threaded joint and molded cable.


RKMVV

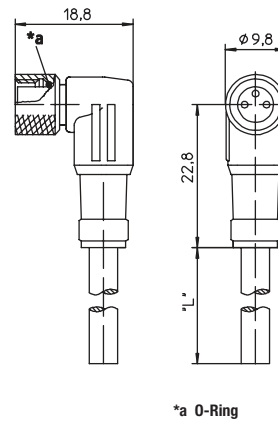


**Pin Assignments**

M8


**3 poles**



**4 poles**



**8 poles**





# Be Certain with Belden

## M8-Round-Plug Connector, Single-Ended Cordsets, According to IEC 61976-2-104

RKMV 3 | RKMV 4 | RKMV 8 | RKMWV 3 | RKMWV 4

### Technical Data

#### Environmental

Degree of protection IP 67 / NEMA 6P  
 Operating temperature range -40°C (-40°F) / +90°C (+194°F)

#### Mechanical

Housing / Molded body TPU  
 Insert PA / TPU  
 Contact CuZn, pre-nickel- and 0.8 microns gold-plated  
 Coupling nut CuZn, nickel-plated

#### Electrical data

Contact resistance ≤ 5 mΩ  
 Nominal current at 40°C 4 A  
 Nominal voltage 3 poles 60 V  
 4 poles 30 V  
 Rated voltage 3 poles 63 V  
 4 poles 36 V  
 Test voltage 3 poles 1.5 kV eff. / 60 s  
 4 poles 0.8 kV eff. / 60 s  
 Insulation resistance > 10<sup>9</sup> Ω  
 Pollution degree 3

### Cable Specifications

Cable No.	Outer Jacket	Conductor Size	Jacket Color	OD
06	PVC	3 x 0.34 mm <sup>2</sup>	Orange	.197" (5.0 mm)
07	PVC	4 x 0.75 mm <sup>2</sup>	Orange	.197" (5.0 mm)
224	PUR, halogen-free	3 x 0.34 mm <sup>2</sup>	Black	.169" (4.3 mm)
225	PUR, halogen-free	4 x 0.34 mm <sup>2</sup>	Black	.185" (4.7 mm)
354	PUR, halogen-free	8 x 0.14 mm <sup>2</sup>	Black	.197" (5.0 mm)

Part Number	Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RKMV 3-06/...M	3	PVC	2 M / 5 M / 10 M	
RKMV 3-224/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RKMV 4-07/...M	4	PVC	2 M / 5 M / 10 M	
RKMV 4-225/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RKMV 8-354/...M	8	PUR, halogen-free	2 M / 5 M / 10 M	