

UPort 1000 Series

1 to 16-port RS-232, RS-422/485, and RS-232/422/485 USB-to-serial converters



Features and Benefits

- Hi-Speed USB 2.0 for up to 480 Mbps USB data transmission rates
- 921.6 kbps maximum baudrate for fast data transmission
- Drivers provided for Windows, WinCE, and Linux
- Mini-DB9-female-to-terminal-block adapter for easy wiring
- LEDs for indicating USB and TxD/RxD activity
- 2 kV isolation protection (for “-I” models)

Certifications



Introduction

The UPort® 1000 Series of USB-to-serial converters is the perfect accessory for laptop or workstation computers that do not have a serial port. They are essential for engineers who need to connect different serial devices in the field or separate interface converters for devices without a standard COM port or DB9 connector.

The UPort® 1000 Series converts from USB to RS-232/422/485. All products are compatible with legacy serial devices, and can be used with instrumentation and point-of-sale applications.

Specifications

USB Interface

Speed	UPort 1100 Series: 12 Mbps UPort 1200/1400/1600 Series: 12 Mbps, 480 Mbps
USB Connector	UPort 1110/1130/1130I/1150: USB Type A UPort 1150I/1200/1400/1600 Series: USB Type B
USB Standards	UPort 1100 Series: USB 1.0/1.1 compliant, USB 2.0 compatible UPort 1200/1400/1600 Series: USB 1.1/2.0 compliant

Serial Interface

No. of Ports	UPort 1100 Series: 1 UPort 1200 Series: 2 UPort 1400 Series: 4 UPort 1600-8 Series: 8 UPort 1600-16 Series: 16
Connector	DB9 male
Baudrate	50 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	None, RTS/CTS, XON/XOFF

Isolation	UPort 1130I/1150I/1250I/1450I: 2kV
Serial Standards	UPort 1110/1410/1610-8/1610-16: RS-232 UPort 1130/1130I: RS-422, RS-485 UPort 1150/1150I/1250/1250I/1450/1650-8/1650-16: RS-232, RS-422, RS-485
Serial Signals	
RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
Power Parameters	
Input Voltage	UPort 1100/1250/1410/1450: 5 VDC ¹ UPort 1250I/1400/1600-8 Series: 12 to 48 VDC UPort 1600-16 Series: 100 to 240 VAC
Input Current	UPort 1110: 30 mA @ 5 VDC UPort 1130: 60 mA @ 5 VDC UPort 1130I: 65 mA @ 5 VDC UPort 1150: 77 mA @ 5 VDC UPort 1150I: 260 mA @ 5 VDC UPort 1250: 360 mA @ 5 VDC UPort 1250I: 200 mA @ 12 VDC UPort 1410/1450: 260 mA @ 12 VDC UPort 1450I: 360 mA @ 12 VDC UPort 1610-8/1650-8: 580 mA @ 12 VDC UPort 1600-16 Series: 220 mA @ 100 VAC
Physical Characteristics	
Housing	UPort 1110/1130/1130I/1150: ABS + Polycarbonate UPort 1150I/1200/1400/1600 Series: Metal
Dimensions	UPort 1110/1130/1130I/1150: 37.5 x 20.5 x 60 mm (1.48 x 0.81 x 2.36 in) UPort 1150I: 52 x 80 x 22 mm (2.05 x 3.15 x 0.87 in) UPort 1200 Series: 77 x 26 x 111 mm (3.03 x 1.02 x 4.37 in) UPort 1400 Series: 204 x 30 x 125 mm (8.03 x 1.18 x 4.92 in) UPort 1600-8 Series: 204 x 44 x 125 mm (8.03 x 1.73 x 4.92 in) UPort 1600-16 Series: 440 x 45.5 x 198.1 mm (17.32 x 1.79 x 7.80 in)
Weight	Packaged: UPort 1110/1130/1130I/1150: 200 g (0.44 lb) UPort 1150I: 320 g (0.72 lb) UPort 1250: 370 g (0.82 lb) UPort 1250I: 680 g (1.5 lb) UPort 1400: 1,345 g (2.96 lb) UPort 1600-8: 1,435 g (3.16 lb) UPort 1600-16: 3,485 g (7.68 lb) Product only: UPort 1110/1130/1130I/1150: 65 g (0.14 lb) UPort 1150I: 75 g (0.65 lb) UPort 1250/1250I: 180 g (0.40 lb) UPort 1400: 720 g (1.59 lb) UPort 1600-8: 835 g (1.84 lb) UPort 1600-16: 2,475 g (5.45 lb)

1. UPort 1410/1450 Series: 5 V for USB port power, 12 V for external power adapter

Environmental Limits

Operating Temperature	0 to 55°C (32 to 131°F)
Storage Temperature (package included)	UPort 1100 Series: -20 to 70°C (-4 to 158°F) UPort 1200/1400/1600 Series: -20 to 75°C (-4 to 167°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class 1
EMS	UPort 1100 Series: IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m IEC 61000-4-8 PFMF UPort 1200/1400/1600 Series: IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m IEC 61000-4-8 PFMF
Safety	UPort 1250/1250I/1410/1450/1450I/1610-8/1610-16/1650-8/1650-16: UL 60950-1

Declaration

Green Product	RoHS, CRoHS, WEEE
---------------	-------------------

MTBF

Time	UPort 1100 Series: 1,949,025 hrs UPort 1200 Series: 563,179 hrs UPort 1410: 394,441 hrs UPort 1450/1450I: 546,770 hrs UPort 1610-8: 208,413 hrs UPort 1650-8: 186,567 hrs UPort 1610-16: 138,704 hrs UPort 1650-16: 120,001 hrs
Standards	MIL-HDBK-217F Telcordia (Bellcore), GB

Warranty

Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents


Device	1 x UPort 1000 Series USB-to-serial converter
Installation Kit	1 x rack-mounting ear (UPort 1600-16 Series) 1 x wall-mounting kit (UPort 1400/1600-8 Series)
Cable	1 x USB type A male to USB type B male (UPort 1150I/UPort 1200/1400/1600 Series)
Connectors	1 x Mini DB9F-to-TB (UPort 1130/1150/1250/1450/1650 Series)

Power Supply	1 x power adapter, universal (UPort 1250I/1450/1450I/1600-8) 1 x power cord (UPort 1600-16)
Documentation	1 x quick installation guide 1 x warranty card

Dimensions


UPort 1110/1130/1150

Unit: mm (inch)

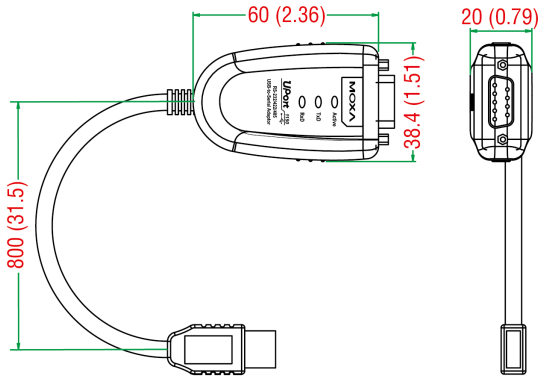


UPort 1130I/1150I

Unit: mm (inch)

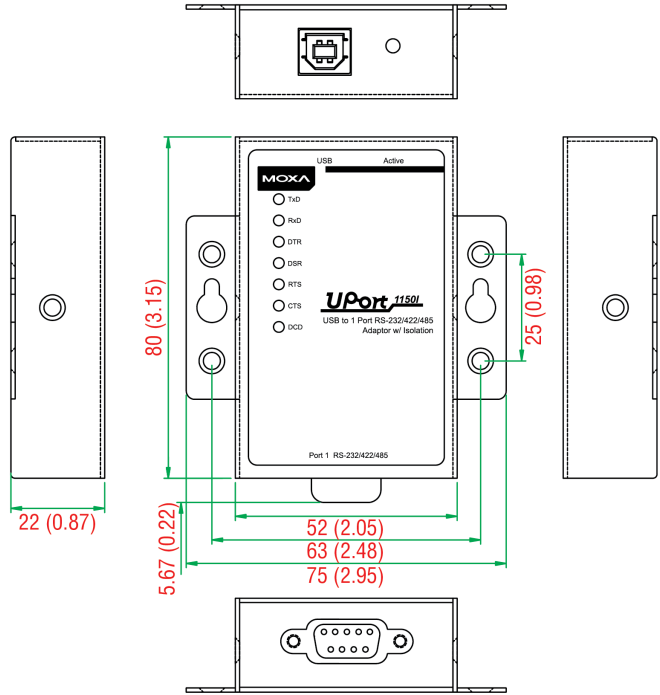


UPort 1250

Unit: mm (inch)

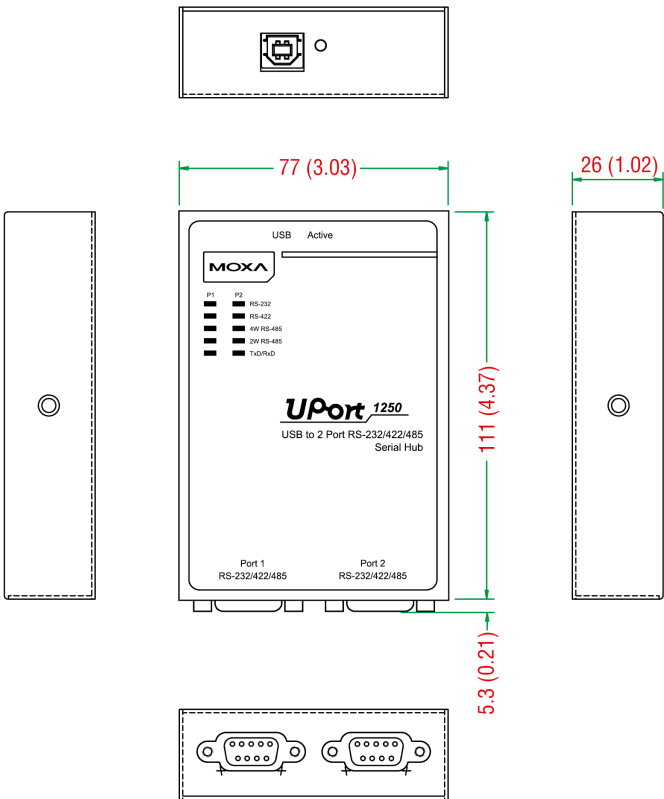


UPort 1250I

Unit: mm (inch)

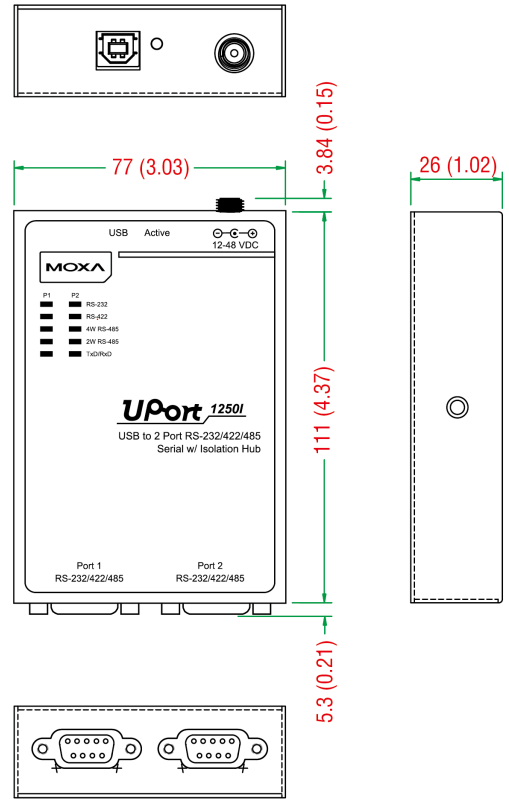


UPort 1450

Unit: mm (inch)

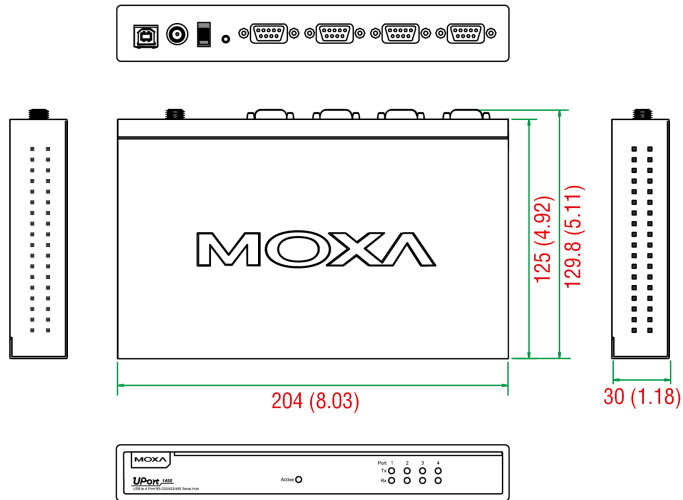


UPort 1650-8

Unit: mm (inch)

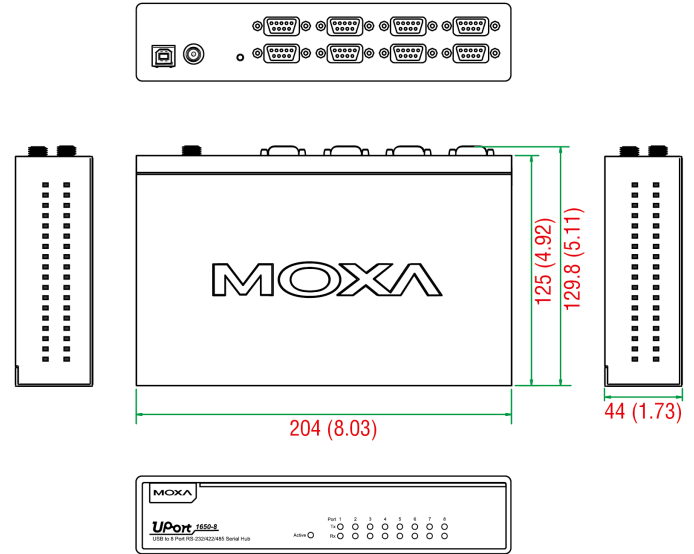

UPort 1650-16

Unit: mm (inch)

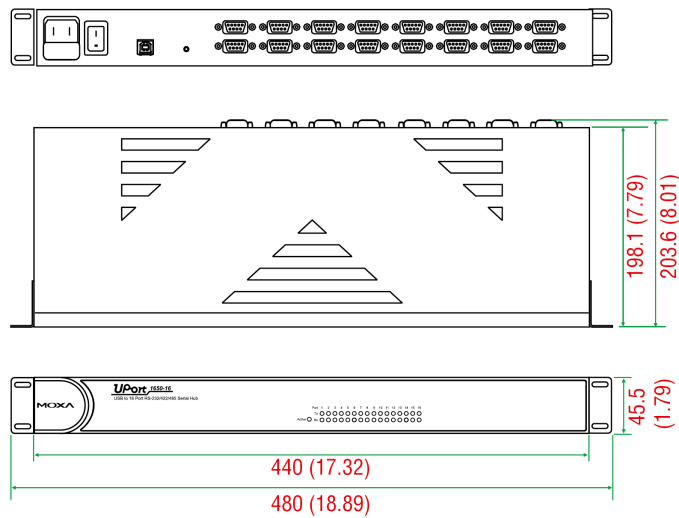

Ordering Information

Model Name	USB Interface	Serial Standards	No. of Serial Ports	Isolation	Housing Material	Operating Temp.
UPort 1110	USB 1.1	RS-232	1	-	ABS+PC	0 to 55°C
UPort 1130	USB 1.1	RS-422/485	1	-	ABS+PC	0 to 55°C
UPort 1130I	USB 1.1	RS-422/485	1	2 kV	ABS+PC	0 to 55°C
UPort 1150	USB 1.1	RS-232/422/485	1	-	ABS+PC	0 to 55°C
UPort 1150I	USB 1.1	RS-232/422/485	1	2 kV	Metal	0 to 55°C
UPort 1250	USB 2.0	RS-232/422/485	2	-	Metal	0 to 55°C
UPort 1250I	USB 2.0	RS-232/422/485	2	2 kV	Metal	0 to 55°C
UPort 1410	USB 2.0	RS-232	4	-	Metal	0 to 55°C
UPort 1450	USB 2.0	RS-232/422/485	4	-	Metal	0 to 55°C
UPort 1450I	USB 2.0	RS-232/422/485	4	2 kV	Metal	0 to 55°C

Model Name	USB Interface	Serial Standards	No. of Serial Ports	Isolation	Housing Material	Operating Temp.
UPort 1610-8	USB 2.0	RS-232	8	–	Metal	0 to 55°C
UPort 1650-8	USB 2.0	RS-232/422/485	8	–	Metal	0 to 55°C
UPort 1610-16	USB 2.0	RS-232	16	–	Metal	0 to 55°C
UPort 1650-16	USB 2.0	RS-232/422/485	16	–	Metal	0 to 55°C

Accessories (sold separately)

Cables

CN20070	10-pin RJ45 to DB9 female serial cable, 1.5 m Applicable Models: UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
NP21101	DB25 male to DB9 female cable for RS-232 transmission, 30 cm
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm
CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m
CBL-RJ45SF9-150	RJ45 to DB9 female serial shielded cable, 1.5 m
CBL-USBA/B-100	USB Type A to USB Type B cable, 1 m

Connectors

Mini DB9F-to-TB	DB9 female to terminal block connector
ADP-RJ458P-DB9F	DB9 female to RJ45 connector

Wireless Adaptors

A-ADP-RJ458P-DB9F-ABC01	DB9 female to RJ45 connector for the ABC-01
-------------------------	---

DIN-Rail Mounting Kits

DK-UP1200	DIN-rail/wall-mounting kit that includes 2 wall-mounting plates with 6 screws (WK-35-02), and 2 DIN-rail plates with 4 screws (DK35A) Applicable Models: UPort 1250I UPort 1250
DK-UP1400	DIN-rail/wall-mounting kit, 2 plates, 6 screws, and 2 DIN-rail plates, 4 screws Applicable Models: UPort 1410 UPort 1650-8 UPort 1610-8 UPort 1450I UPort 1450

Wall-Mounting Kits

WK-35-01	Wall-mounting kit, 2 plates, 6 screws, 35 x 44 x 2.5 mm
WK-51-01	Wall-mounting kit, 2 plates, 6 screws, 51.6 x 67 x 2 mm Applicable Models: UPort 1250 UPort 1250I

Rack-Mounting Kits

WK-44-01	Wall-mounting kit, 2 L-shaped plates, 6 screws, 44 x 35 x 2.5 mm Applicable Models:
----------	--

	UPort 1150I
Power Adapters	
PWR-12125-DT-S2	Desktop power supply (requires power cord), 12 VDC, 1.25 A, 100-240 VAC, 0 to 40°C operating temperature Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
Power Cords	
PWC-C13AU-3B-183	Power cord with Australian (AU) plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13CN-3B-183	Power cord with three-prong China (CN) plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13EU-3B-183	Power cord with Continental Europe (EU) plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13JP-3B-183	Power cord with Japan (JP) plug, 7A/125V, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13UK-3B-183	Power cord with United Kingdom (UK) plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13US-3B-183	Power cord with United States (US) plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C7AU-2B-183	Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
PWC-C7CN-2B-183	Power cord with two-prong China (CN) plug, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
PWC-C7EU-2B-183	Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m Applicable Models:

	UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
PWC-C7JP-2B-183	Power cord with Japan (JP) plug, 7A/125V, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
PWC-C7UK-2B-183	Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
PWC-C7US-2B-183	Power cord with United States (US) plug, 10A/125V, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8

© Moxa Inc. All rights reserved. Updated Jan 18, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.