



# ProDVX GM-75

## Instruction manual

For more information,  
scan the QR code:




**PRO DVX**

[www.prodvx.com](http://www.prodvx.com)

# ProDVX GM-75

## Glass Mount

Thank you for choosing the ProDVX GM-75 Glass Mount. This is a step-by-step instruction manual to successfully install the ProDVX GM-75 Glass Mount for your 10" display. The ProDVX GM-75 Glass Mount contains the following parts:

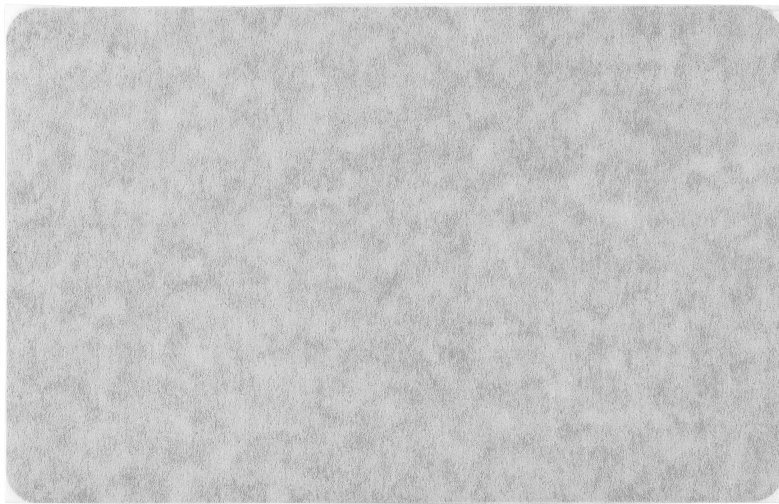

- 1 x Glass Mount Cover Sticker
- 1 x ProDVX GM-75 Mount frame
- 1 x adhesive strip
- 4 x short VESA screws
- 2 x safety screws

Please contact [support@prodvx.com](mailto:support@prodvx.com) if you need additional support.



# Applying the Glass Mount Cover Sticker

1. Clean the surface, preferably with Pro-Screen Cleaner spray.
2. Affix the Glass Mount Cover Sticker to the glass where the tablet will be placed.
3. Use a solid straight item to even out the Glass Mount Cover Sticker.
4. Even out big bubbles with the straight item (little bubbles will disappear in time).
5. Gently pull down the paper from the front side.
6. Clean the Glass Mount Cover Sticker with Pro-Screen Cleaner spray and let it dry for ten minutes



## Mounting your device

7. Remove the white paper from the adhesive strip and attach it to the backside of the ProDVX GM-75 Mount frame. Then wait for 15 minutes.
  8. Remove the red paper from the adhesive strip and press the ProDVX GM-75 Mount frame firmly onto the Glass Mount Cover Sticker. Hold it for one minute.
- Note:** Before mounting and turning on the device, wait for 2-3 hours to allow the adhesive to take hold. At room temperature, approximately 50% of the ultimate strength will be achieved after 20 minutes, 90% after 24 hours, and 100% after 72 hours.
9. Screw the four VESA screws into the VESA holes of your 10" display. Tighten them by hand so that they stick out a few millimeters for affixing into the keyholes.
  10. Align the screws on the back of the device with the four large keyholes on the ProDVX GM-75 Mount frame and slide from left to right until you hear a click!
  11. Insert the two included safety screws into the top of the mounting plate. This will lock the mounting screws into place.

